

D6254

SIL2 2/4-Wire Transmitter Trip Amplifier


The 2/4-Wire Transmitter Trip Amplifier D6254 provides a fully floating dc supply to energize conventional 2 wires 4-20 mA transmitters located in Hazardous Area; it also accepts 0/4-20 mA current input signals, as well as ± 12 V voltage inputs. The module repeats/converts the input as on current signal, in a floating circuit, suitable for applications requiring SIL 2 in safety related systems for high risk industries. The output signal can be in direct or reverse form. Two independent Alarm Trip Amplifiers are also provided.

FEATURES

- SIL 2 / SC 3
- ± 12 V Voltage Input
- 0/4-20 mA Active-Passive Input, Source-Sink Output
- Input and Output short circuit proof
- Modbus RTU RS-485 for monitor & configuration
- Out-of-range fault detection
- Optional alarm acknowledgement input
- Fully programmable operating parameters
- High Accuracy, μ P controlled A/D converter
- Three port isolation, Input/Output/Supply

FUNCTION DIAGRAM

Additional installation diagrams may be found in Instruction Manual.

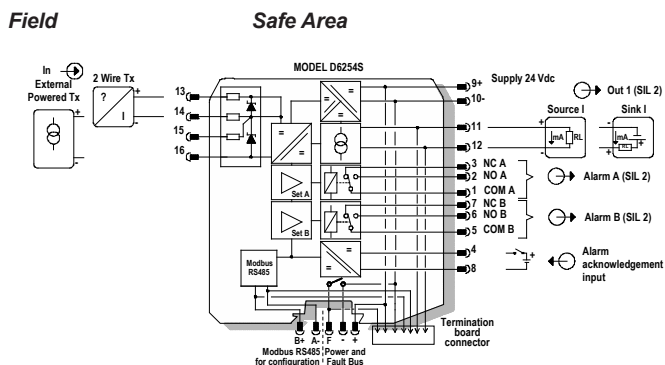

TECHNICAL DATA

Supply

24 Vdc nom (21.5 to 30 Vdc), reverse polarity protected.

Current consumption: 110 mA @ 24 Vdc with 20 mA input/output and alarm relays energized, typical.

Power dissipation: 2.3 W @ 24 Vdc with 20 mA input/output and alarm relays energized, typical.

Input

0/4 to 20 mA (separately powered input, voltage drop ≤ 0.5 V) or 4 to 20 mA (2 wires Tx current limited ≈ 25 mA), or voltage input ± 12 V.

Integration time: 100 ms.

Input range: 0 / +25 mA for current, ± 12 V for voltage.

Transmitter line voltage: 15.5 V typical, 15.0 V minimum, @ 20 mA.

Acknowledgement input

Logic level reverse polarity protected.

Voltage range: 0 V \leq OFF \leq 5 V, 18 V \leq ON \leq 30 V.

Current consumption: 10 mA @ 24 Vdc, typical.

Output

Fully customizable 0/4 to 20 mA, on max. 300 Ω load source mode, current limited @ 25 mA.

Transfer characteristic: linear, direct or reverse, square root.

Response time: ≤ 100 ms (10 to 90% step change).

Alarm

Trip point range: within rated limits of input sensor.

Output: two voltage free SPDT relay contacts.

Contact rating: 4 A 250 Vac 1000 VA, 4 A 250 Vdc 120 W (resistive load).

DC and AC load breaking capacity: refer to Instruction Manual.

Modbus interface

Modbus RTU RS-485 up to 115.2 kbps for monitor/configuration/control.

Isolation

I.S. In/Other 1.5 kV; Alarms/Other 1.5 kV; Alarm/Alarm 1.5 kV; Out/Supply 500 V; Out/Ack 500 V; Ack/Supply 500 V.

Environmental conditions

Operating temperature: temperature limits -40 to $+70$ $^{\circ}$ C.

Storage temperature: temperature limits -45 to $+80$ $^{\circ}$ C.

Mounting

DIN-Rail 35 mm, with or without Power Bus or on custom Term. Board.

Weight: about 120 g.

Connection: by polarized plug-in disconnect screw terminal blocks to accommodate terminations up to 2.5 mm² (13 AWG).

Dimensions: Width 22.5 mm, Depth 123 mm, Height 120 mm.

ORDERING INFORMATION

D6254S: 1 channel

Accessories

Bus Connector JDFT050, Bus Mounting Kit OPT5096.

Programmable USB serial line Kit PPC5092 + SWC5090.